

SL-X Model (f/k/a SU2013)


sealock 

Strong Just Got Stronger

Continuing Sealock's industry-leading innovation, the SL-X takes tamper-indicative container security to the next level. Combining a super tough high grade carbon steel alloy bar with a patented braided cable seal, the SL-X makes great bend/cut resistance even greater while coming in at a lighter weight than ever.

Super strong products. Continuous commitment to delivering step-ahead container security solutions. Sealock—The Only Seal That Locks, The Only Lock That Seals.

Visit www.sealock.com now to learn more.

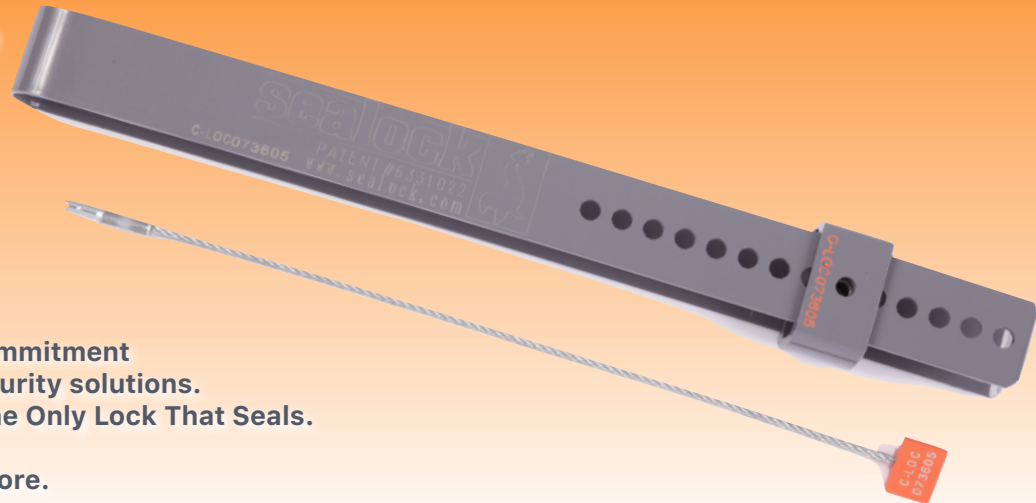


Mounts in seconds without tools.



Dual function. Provides both sealing and locking functions simultaneously.



Requires 2 cuts for removal. (Cable 1x and U-Bar 1x)

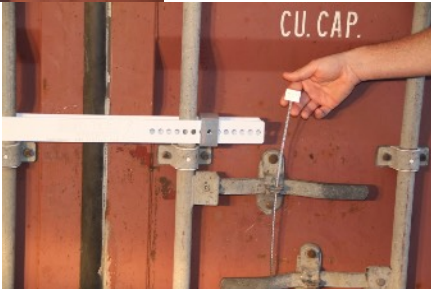

Fully compliant with ISO 17712:2013 w/ Clause 6 standards. CTPAT and AEO compliant.



Packaging Details

Inner box contains 10 pcs.
Outer carton contains 2 x 10 pcs.

Carton size: 53 cm x 31 cm x 24 cm
Gross weight: 32.15 kg
Net weight: 30.60 kg

- U-Bar constructed of high-grade carbon alloy spring steel 50CrV4, heat-treated and hardened to Rockwell standard HRC45. 50CrV4 is a fine grained, highly abrasion-resistant carbon-chromium alloy steel. Very good shock resistance and toughness are key properties of this alloy in its heat-treated condition. Commonly employed in heavily stressed machinery parts including shafts, gears, pinions and hand tool components.
- Lighter in weight yet stronger than all previous models.
- Gray baked-on enamel finish, markings engraved in U-Bar and aluminum alloy lock body.
- Numbered steel braided aircraft cable with bullet tip is integral part of the locking system. (U.S. Patent No. 6,331,022)
- Braided cable frays when cut, making re-welding impossible.
- Same numerical sequence appears on all 3 components for added security.
- Designed to fit most swing door conveyances.



ASOCIACIÓN DE EMPRESAS SEGUROS

Supply Chain Security



